
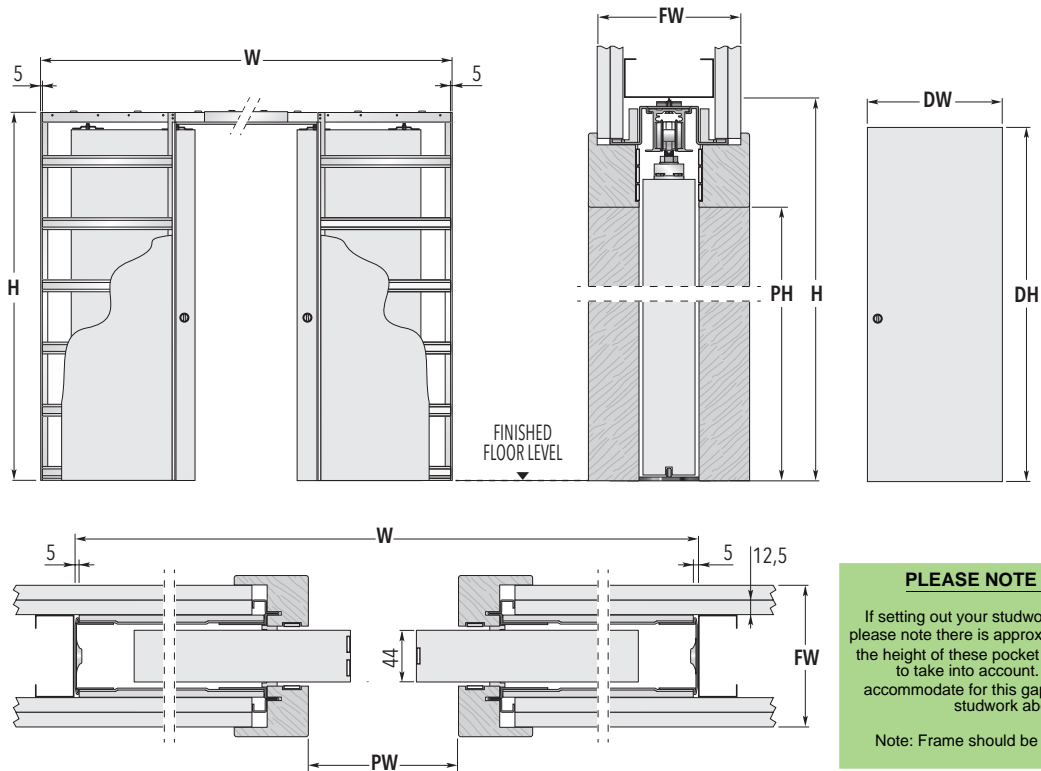


CLASSIC DOUBLE FIRE RATED DOUBLE FD30 POCKET DOORS SYSTEM

Double Fire rated Pocket Door System
For FD30 rated doors



PLEASE NOTE INBUILT TOLERANCE

If setting out your studwork before delivery of your frame please note there is approximately an 8mm tolerance built into the height of these pocket door systems which you will need to take into account. Packers may be required to accommodate for this gap if you are unable to adjust the studwork above the system.

Note: Frame should be installed at finished floor level.

FRAMES FOR DOUBLE DOORS			DOOR PANEL UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL FW	DW	DH
1180 x 2020	2494 x 2120	120	626	2040
1380 x 2020	2894 x 2120	120	726	2040
1580 x 2020	3294 x 2120	120	826	2040
1780 x 2020	3694 x 2120	120	926	2040
1980 x 2020	4094 x 2120	120	1026	2040
1150 x 1960	2464 x 2061	120	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
1302 x 1960	2816 x 2061	120	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
1454 x 1960	3168 x 2061	120	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
1606 x 1960	3320 x 2061	120	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
1780 x 1960	3694 x 2061	120	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	

Dimensions are given in mm



NOTES

- ▶ Suitable for use with 44 mm thick FD30 timber doors (not supplied)
- ▶ Supplied with special jambs with integrated architrave.
- ▶ Max. door weight 100 kg.
- ▶ FD30 door and fireboard not supplied.
- ▶ Install at finished floor level.
- ▶ Self centering floor guide with anti-warp profile.
- ▶ Finished wall thickness 120 mm (frame thickness 70 mm).
- ▶ Intumescent strips included.
- ▶ Use two layers of 12.5 mm fireboard each side (not supplied).



ACCESSORIES

- ▶ **Self Closing Mechanism***
Open the door and it closes by itself
 - ▶ **BIAS®**
Soft close anti-slam device with 40 kg soft closing
- * Please check first with your Building Inspector prior to ordering to determine whether or not your particular project will require a self-closing mechanism.



INTERNATIONAL FIRE
CONSULTANTS GROUP

The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.