


TELESCOPIC DOUBLE

FRAME FOR TWO SETS OF PARALLEL DOORS

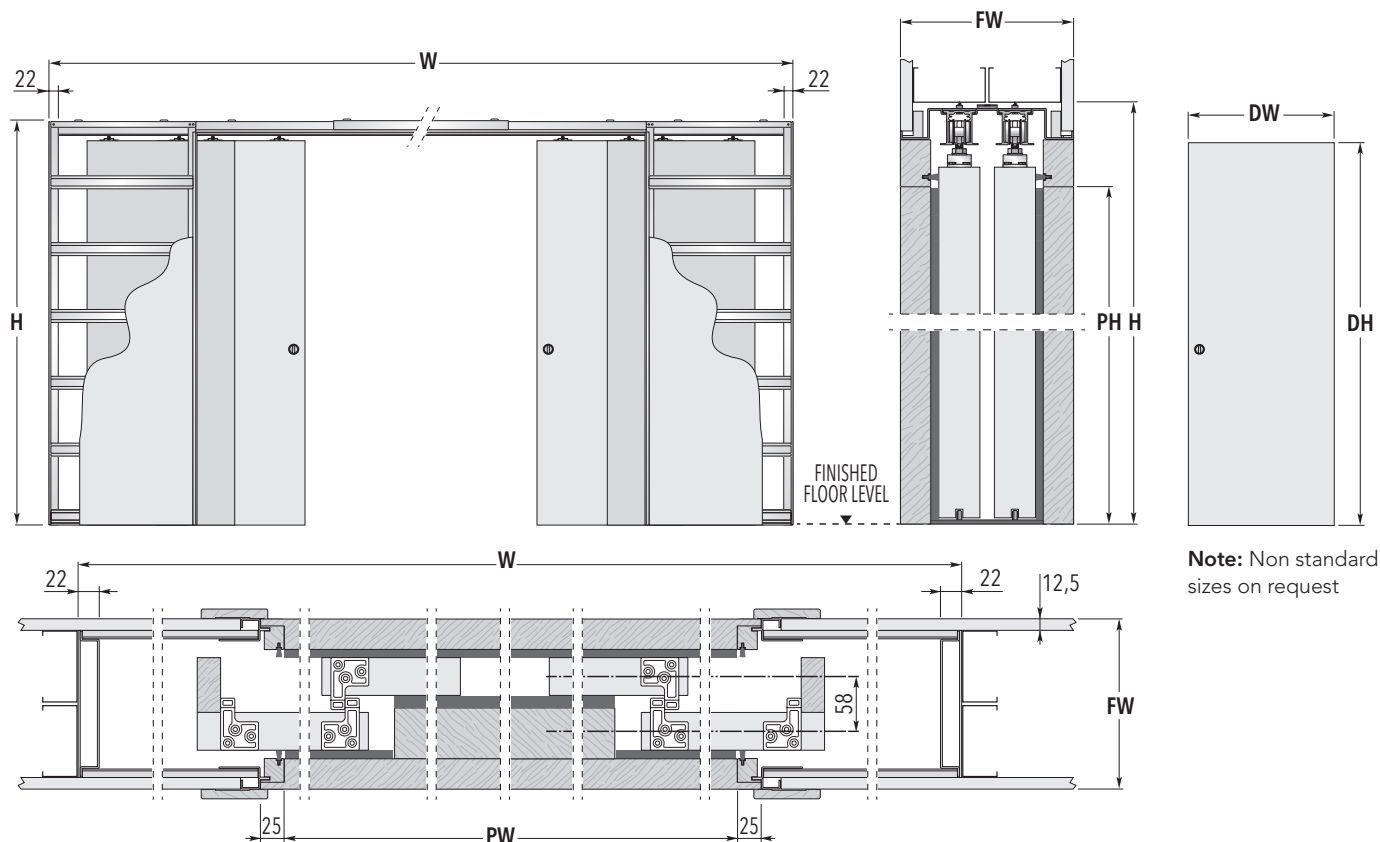

Note: Non standard sizes on request

PLEASE NOTE. ECLISSE advise you build a 3-5mm tolerance into your stud dimensions for both width and height to ensure a good fit, use packers at all fixing points to ensure the system is installed plumb, level and square.

FRAMES FOR TWO PARALLEL DOORS			DOOR PANELS UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL FW	DW	DH
2300 x 2030	3652 x 2115	180	626	2040
2700 x 2030	4252 x 2115	180	726	2040
3100 x 2030	4852 x 2115	180	826	2040
3500 x 2030	5452 x 2115	180	926	2040
3900 x 2030	6052 x 2115	180	1026	2040
2236 x 1971	3588 x 2056	180	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
2540 x 1971	4092 x 2056	180	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
2844 x 1971	4596 x 2056	180	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
3148 x 1971	4900 x 2056	180	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
3452 x 1971	5404 x 2056	180	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	

Dimensions are given in mm



NOTES

- ▶ Non standard sizes available up to PW 4700 x PH 2600mm.
- ▶ Suitable for 35 or 44mm thick doors.
- ▶ Includes a full timber lining kit for a professional finish.
- ▶ Door panels, plasterboard and final architraves not supplied.
- ▶ When fully open the leading door panel projects 9 cm out of the pocket.
- ▶ Install at finished floor level.
- ▶ Max. door panel weight 100 kg.



ACCESSORIES

- ▶ **Door Furniture**
Flush pulls and bathroom locks
- ▶ **Telescopic Synchronisation**
Open and close both door panels (of each side) with smooth action (recommended)